


# Model 2110R2 Barrier Device (DIN Mountable)

## For Electrolab Model 2100 Digital Level Sensors

The Model 2110R2 Barrier Device is an intrinsically safe DIN Rail Mountable device that actively limits the current and voltage to protect the Model 2100 DLS from power spikes and to maintain the sensors intrinsic safety. The device conforms to UL 913 Intrinsically Safe Apparatus and Associated Apparatus for use in Class I, Division 1 hazardous locations.

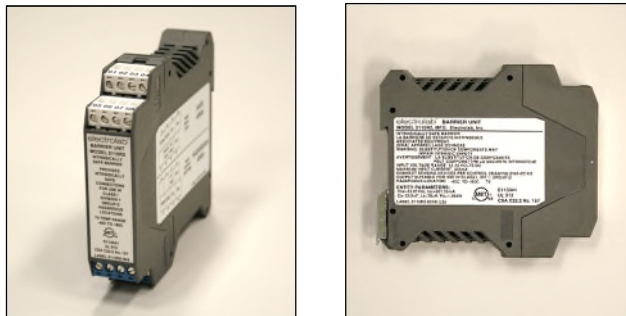

### FEATURES

- Simplified installation using standard DIN Rail
- One device handles up to five Digital Level Sensors
- Robust, compact, ventilated enclosure
- Highly reliable SMD components
- No in-field DIP switch programming required

### SPECIFICATIONS

Input Voltage: 12 - 15 VDC  
Input Current: 100 mA max  
Operating temperature range:  
-40 °C to +60 °C

### Electrical Parameters

Max Output Voltage:  
12.81 VDC  
Nominal I/O Voltage Drop:  
5 VDC  
Max Output Current: 86 mA

### Dimensions


Housing size: .9" x 3.9" x 4.5"

### Product Classification

Class I, Division 1, Group D  
Temperature Rating T4

### Product Approval

UL 913  
CSA C22.2, No. 157

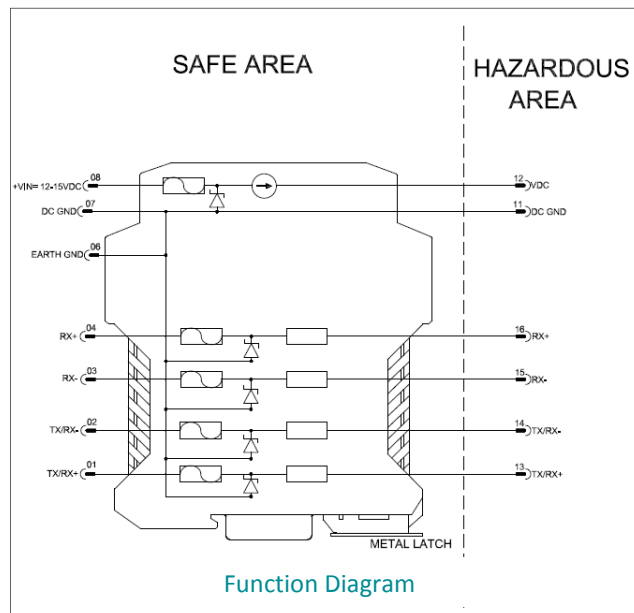

#### Headquarters

159 Enterprise Parkway  
Boerne, Texas 78006  
1-210-824-5364 (phone)  
1-888-301-2400 (toll free)

All rights reserved.  
This document is subject to  
change without prior notice.  
The information in this  
document provides a general  
description of the product and  
available options. Please  
contact us for specific  
technical options for your  
application.

[www.electrolabcontrols.com](http://www.electrolabcontrols.com)

Copyright© 2016, Electrolab,  
Inc.

EL# 29087

